



END SEALING FERRULES INSULATED AS PER DIN - 46228

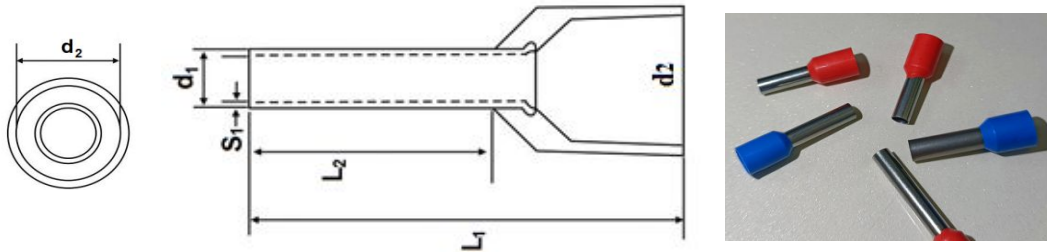

All dimensions in mm

Size mm ²	d1	d2	L1	L2	S1	CORDLUG CAT NO.
0.5	1.0	2.6	12.0	6.0	0.15	L0506
0.5	1.0	2.6	14.0	8.0	0.15	L0508
0.5	1.0	2.6	16.0	10.0	0.15	L0510
0.75	1.2	2.8	12.0	6.0	0.15	L7506
0.75	1.2	2.8	14.0	8.0	0.15	L7508
0.75	1.2	2.8	16.0	10.0	0.15	L7510
0.75	1.2	2.8	18.0	12.0	0.15	L7512
1.0	1.4	3.0	12.0	6.0	0.15	L1006
1.0	1.4	3.0	14.0	8.0	0.15	L1008
1.0	1.4	3.0	16.0	10.0	0.15	L1010
1.0	1.4	3.0	18.0	12.0	0.15	L1012
1.5	1.7	3.5	14.0	8.0	0.15	L1508
1.5	1.7	3.5	16.0	10.0	0.15	L1510
1.5	1.7	3.5	18.0	12.0	0.15	L1512
1.5	1.7	3.5	24.0	18.0	0.15	L1518
2.5	2.2	4.2	14.0	8.0	0.15	L2508
2.5	2.2	4.2	16.0	10.0	0.15	L2510
2.5	2.2	4.2	18.0	12.0	0.15	L2512
2.5	2.2	4.2	24.0	18.0	0.15	L2518
4.0	2.8	4.8	17.0	10.0	0.2	L4010
4.0	2.8	4.8	20.0	12.0	0.2	L4012
4.0	2.8	4.8	26.0	18.0	0.2	L4018
6.0	3.5	6.3	20.0	12.0	0.2	L6012
6.0	3.5	6.3	26.0	18.0	0.2	L6018

END SEALING FERRULES INSULATED AS PER DIN - 46228

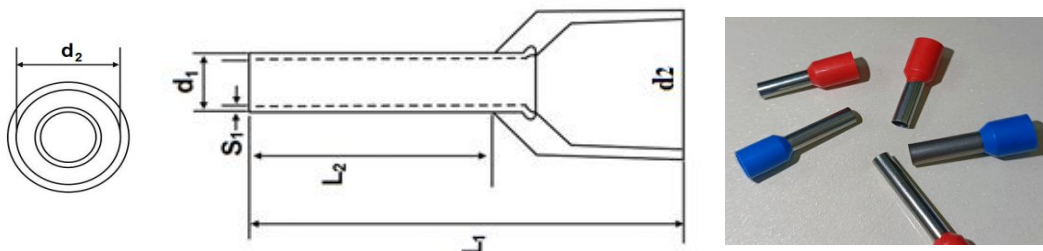

All dimensions in mm

Size mm ²	d1	d2	L1	L2	S1	CORDLUG CAT NO.
10.0	4.5	7.6	22.0	12.0	0.2	L10-12
10.0	4.5	7.6	28.0	18.0	0.2	L10-18
16.0	5.8	8.8	24.0	12.0	0.2	L16-12
16.0	5.8	8.8	28.0	18.0	0.2	L16-18
25.0	7.3	11.2	28.0	16.0	0.2	L25-16
25.0	7.3	11.2	35.0	22.0	0.2	L25-22
35.0	8.3	12.7	30.0	16.0	0.2	L35-16
35.0	8.3	12.7	32.0	18.0	0.2	L35-18
35.0	8.3	12.7	39.0	25.0	0.2	L35-25
50.0	10.3	15.0	36.0	20.0	0.2	L50-20
50.0	10.3	15.0	40.0	25.0	0.2	L50-25
70.0	13.5	16.0	37.0	21.0	0.4	L70-21
95.0	14.7	18.0	44.0	25.0	0.4	L95-25
120.0	16.7	20.0	48.0	27.0	0.45	L120-27
150.0	19.5	23.0	58.0	32.0	0.5	L150-32